

Flail Mowers

TX52 Flail Mower

DIMENSIONS AND WEIGHT

| | |
|----------------|-------------------------------------|
| WEIGHT | 540 LBS |
| CUTTING WIDTH | 4ft 4in (52 in) |
| CUTTING HEIGHT | VARIABLE; 1.06 in, 1.65 in, 1.85 in |

GENERAL

| | |
|------------------------|-------------------------|
| TYPE AND NO. OF BLADES | Y BLADES, 40 |
| BLADE MOUNTING POINTS | 20 |
| NO. OF BELTS | 3 |
| REAR ROLLER | ADJUSTABLE; 3 POSITIONS |
| BELT TENSIONER | ADJUSTABLE |
| GREASE FITTINGS | YES |

TRACTOR REQUIREMENTS

| | |
|---------------------------|-----------------|
| MIN. TRACTOR ENGINE POWER | 20 HP |
| TRACTOR HITCH | CAT. 1, 3-POINT |
| PTO | 540 RPM |

TS62 Flail Mower

DIMENSIONS AND WEIGHT

| | |
|----------------|-------------------------------------|
| WEIGHT | 594 LBS |
| CUTTING WIDTH | 5ft 2in (62 in) |
| CUTTING HEIGHT | VARIABLE; 1.06 in, 1.65 in, 1.85 in |

GENERAL

| | |
|------------------------|-------------------------|
| TYPE AND NO. OF BLADES | Y BLADES, 48 |
| BLADE MOUNTING POINTS | 24 |
| NO. OF BELTS | 3 |
| REAR ROLLER | ADJUSTABLE; 3 POSITIONS |
| BELT TENSIONER | ADJUSTABLE |
| GREASE FITTINGS | YES |

TRACTOR REQUIREMENTS

| | |
|---------------------------|-----------------|
| MIN. TRACTOR ENGINE POWER | 25 HP |
| TRACTOR HITCH | CAT. 1, 3-POINT |
| PTO | 540 RPM |

TM73 Flail Mower

DIMENSIONS AND WEIGHT

| | |
|----------------|-------------------------------------|
| WEIGHT | 660 LBS |
| CUTTING WIDTH | 6ft 3in (73 in) |
| CUTTING HEIGHT | VARIABLE; 1.06 in, 1.65 in, 1.85 in |

GENERAL

| | |
|------------------------|-------------------------|
| TYPE AND NO. OF BLADES | Y BLADES, 56 |
| BLADE MOUNTING POINTS | 28 |
| NO. OF BELTS | 3 |
| REAR ROLLER | ADJUSTABLE; 3 POSITIONS |
| BELT TENSIONER | ADJUSTABLE |
| GREASE FITTINGS | YES |

TRACTOR REQUIREMENTS

| | |
|---------------------------|-----------------|
| MIN. TRACTOR ENGINE POWER | 35 HP |
| TRACTOR HITCH | CAT. 1, 3-POINT |
| PTO | 540 RPM |

TL84 Flail Mower

DIMENSIONS AND WEIGHT

| | |
|----------------|-------------------------------------|
| WEIGHT | 826 LBS |
| CUTTING WIDTH | 7ft 4in (84 in) |
| CUTTING HEIGHT | VARIABLE; 1.06 in, 1.65 in, 1.85 in |

GENERAL

| | |
|------------------------|-------------------------|
| TYPE AND NO. OF BLADES | Y BLADES, 64 |
| BLADE MOUNTING POINTS | 32 |
| NO. OF BELTS | 3 |
| REAR ROLLER | ADJUSTABLE; 3 POSITIONS |
| BELT TENSIONER | ADJUSTABLE |
| GREASE FITTINGS | YES |

TRACTOR REQUIREMENTS

| | |
|---------------------------|-----------------|
| MIN. TRACTOR ENGINE POWER | 45 HP |
| TRACTOR HITCH | CAT. 1, 3-POINT |
| PTO | 540 RPM |




PHONE: 833-888-IBEX
EMAIL: info@ibexequipment.com
WEBSITE: ibexequipment.com

Flail Mowers




CATEGORY 1, 3-POINT HITCH

Three attachment points on the lower pins of the 3 point hitch allow mounting on multiple sizes of Category 1 tractors.

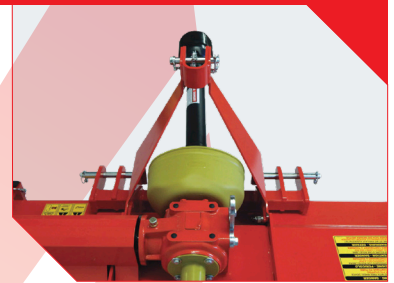

CAN BE USED IN THE REAR-MOUNTED POSITION.

Reversible mounting capability allows the mower to operate while driving in reverse, allowing material to be cut before it is run over by the tractor. This can be especially handy feature when mowing down tough brush like multiflora rose and bush honeysuckle. The rear roller sets cutting height and leaves behind an attractive stripe pattern on lawns.

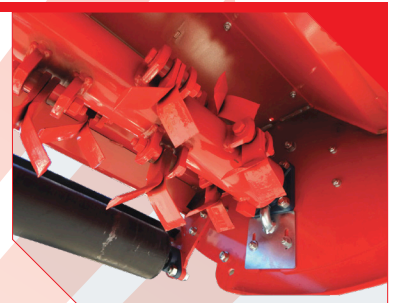

PARKING POSITION

Parking stand keeps the mower in the proper position for unmounting and mounting.



HIGH END QUALITY AT A PRICE EVERYONE CAN AFFORD

Ibex flail mowers are of high Italian engineering and manufacturing quality.

- HEAVY GAUGE ITALIAN QUALITY RAW MATERIALS
- LASER WELDED CASE
- REINFORCED UNDERBELLY
- HIGHLY DURABLE 3 POINT HITCH CONSTRUCTION
- ELEGANTLY ENGINEERED AND DESIGNED FOR MAXIMUM DURABILITY AND OUTPUT
- 3 TYPES OF QUALITY BLADE CHOICES: FINISH CUT BLADES, BRUSH CUT Y BLADES AND HEAVY DUTY HAMMER BLADES
- TOP QUALITY BEARINGS WITH GREASE-ABLE FITTINGS
- 2 HEAVY DUTY TRANSMISSION BELTS DESIGNED WITH AN ADJUSTABLE TENSIONER PULLEY
- ADJUSTABLE 3 POSITION REAR ROLLER

